

AFM-CD23RQ85 C



Dome Camera with Flexible 3-axis Bracket



Key Features

- 1/4" CMOS Sensor
- Minimum Illumination 0.1LUX@(F1.2,AGC ON), 0 LUX with IR
- High resolution 850TVL image is clear delicate
- 30pcs $\Phi 5$ IR LED, IR Distance:20M
- 4/6/8/2.8-12mm lens (option)
- Within the qualifying bracket, multi-angle adjustable
- Support ICR IR filter automatically switches, automatic color to black day and night surveillance
- Lightning protection

Dimensions (Unit :mm)

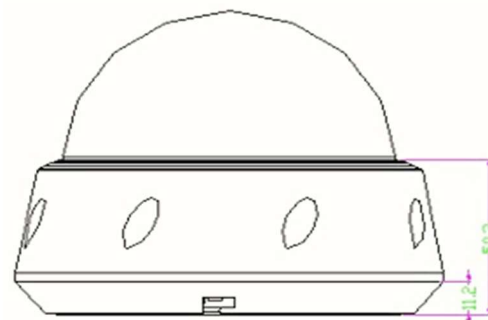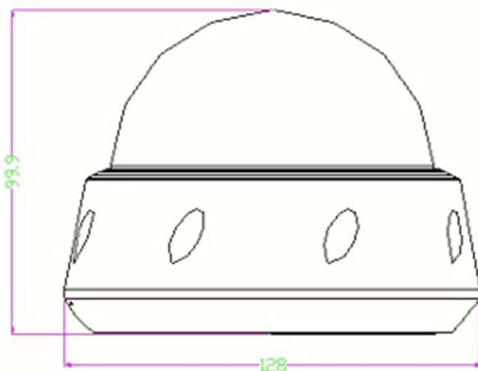

Specifications

MODEL	AFM-CD23RQ85 C
Camera	
Image sensor	1/4" Aptina139 CMOS Sensor
Effective Pixels	640(H) \times 480(V)
S/N Ratio	More than 50dB
Min. Illumination	Color : 0.1Lux@F1.2(AGC ON), 0Lux IR LED on
Electronic Shutter	1/50s~1/100,000s; 1/60s~1/100,000s
Lens	4/6/8/2.8-12mm lens (option)
Video Output	CVBS/1.0Vp-p/75 Ω
Sync System	Internal
IR LED	30pcs $\Phi 5$ IR LED
Day/Night	IR Cut AUTO Switch
White Balance	Auto
BLC	Auto
IR Distance	20m
General	
Power Supply	DC12V (AC24 optional)
Power Consumption	0.84W/3.24W(IR on)
Working Environment	-20 $^{\circ}$ C~+50 $^{\circ}$ C
Dimension	$\phi 128$ x 100mm
Weight	1.05kg(without support)

* Specifications are subject to change without prior notice.